

Bage Double-72-LA00-LED



Type: Suspension/Pendant

Matériaux/Materials: Aluminium powder coat

Specifications: Bande LED Stripe • Driver 60W24VDC dimmable • Dim to warm (see below for output options)

Option A • 4.39W/ft. • 275 lumens @2400K • 1800K to 3000K Dim to warm

Option B • 4.5W/ft. • 610 lumens @2400K • 1800K to 3000K Dim to warm

Option C • 610 lumens • 3000K No Dimming

Poids/Weight: 8 lb.



Garantie/Warranty: 5 ans/years

Certification: 

Usage intérieur seulement/Indoor use only

Lien 3D/link : [Cliquez ici/Click here](#)


Pour tous les fichiers 3D, incluant CAD, Revit et IES, visitez le www.luminaireauthentik.com / For 3D drawings of all products, including CAD, Revit and IES files, please visit www.luminaireauthentik.com

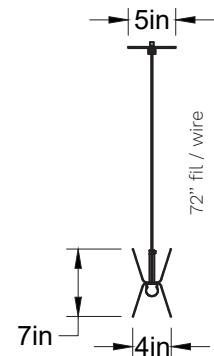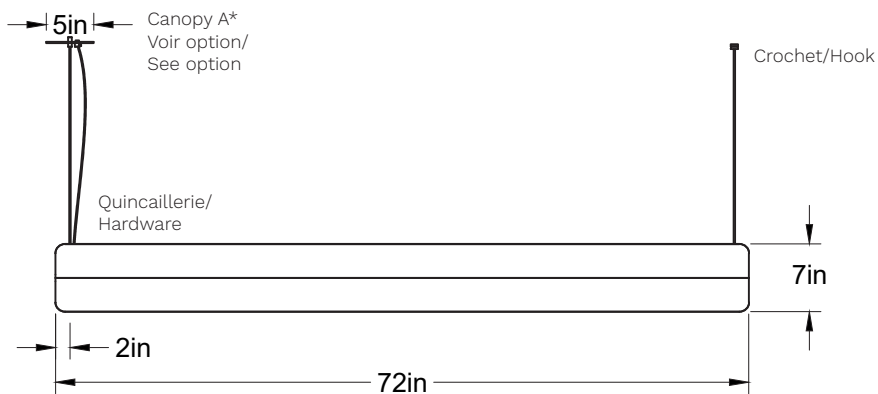


Avant/Front

Côté/Side

Abat-jour/Shade Ext-2.

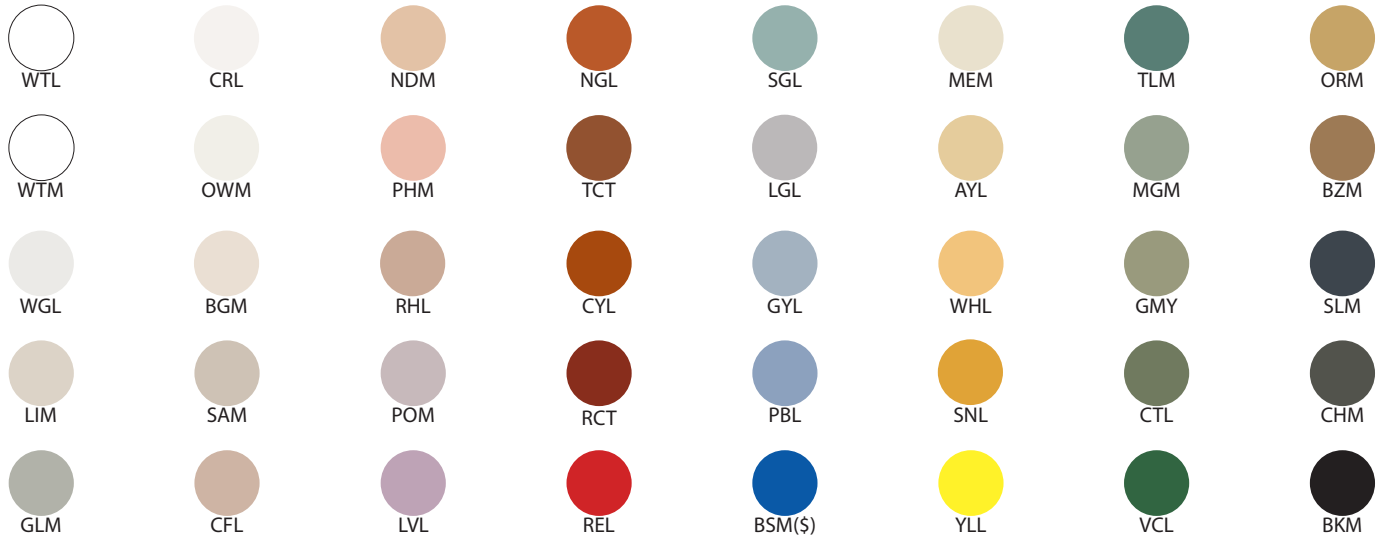

Abat-jour/Shade Ext-1.

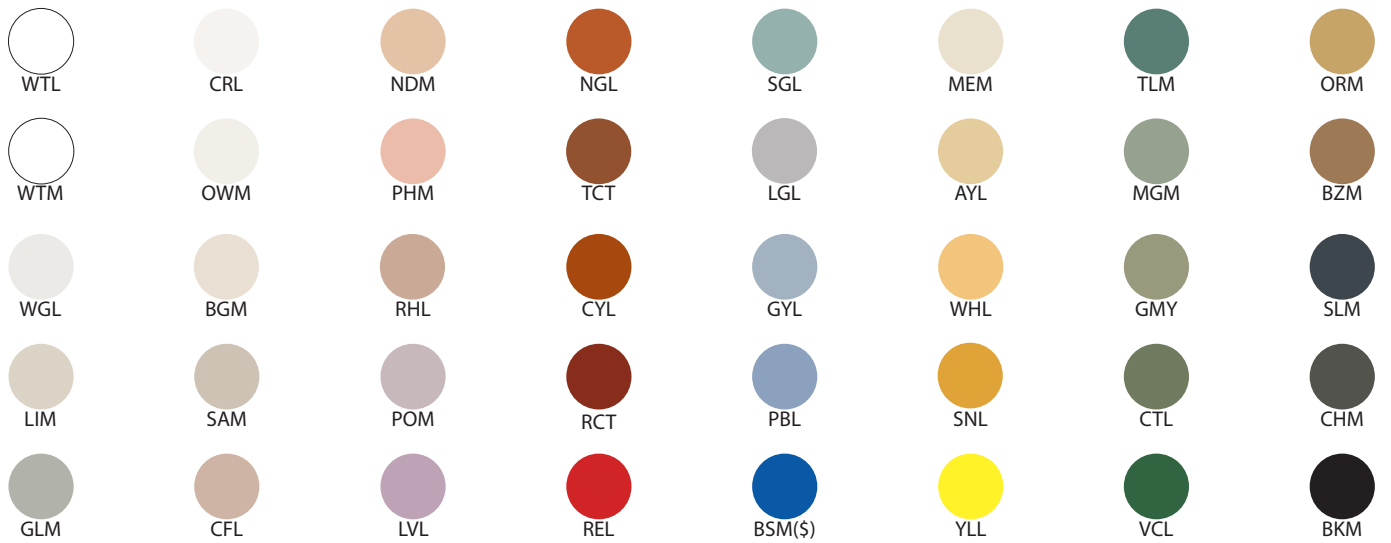

Fil/Wire



Quincaillerie/Hardware



Canopy style + colour



Quincaillerie Suspension/Canopy Cable Hardware



Crochet/Hook





LUMINAIRE AUTHENTIK

Notre collection Linéaire (Linjär et Platt) utilise une bande LED "Dim to Warm" pour offrir une ambiance unique à vos besoins. Pour garantir la meilleure performance possible, voilà une liste de gradateurs qui ont été testés et approuvés pour cette technologie. Pour de meilleurs résultats, assurez-vous d'avoir une alimentation électrique stable.

Our Linear collection (Linjär and Platt) uses a "Dim to Warm" LED strip to provide a unique ambiance to your needs. To ensure the best possible performance, here is a list of dimmers that have been tested and approved for this technology. For best results, make sure you have a stable power supply.

Gradateurs Recommandés / Recommended Dimmers

LUTRON SCL-153PR-WH
LUTRON DVCL-153PR-WH / DVCL-153P-BL
LUTRON DVWCL-153PH-LA
LUTRON CTCL-153PDH-LA
LUTRON TGCL-153PR-WH / TGCL-153PH-WH
LUTRON MACL-153MH-LA / MACL-153M-BR
LUTRON CT-600PR-IV / CT-600PR-WH / CT-603PGH-WH / CT-103PR-WH
LUTRON DV-600PR-BL / DV-600PR-WH
LUTRON DVW-603PGH-WH
LUTRON TG-600PR-LA / TG-600PR-IV / TG-600PR-WH / TG-10PR-WH
LUTRON S-600PR-WH
LUTRON MRF2-6ND-120-AL / MRF2-6CL-GR / MRF2-6ELV-120-TP
LUTRON MSCELV-600M-BI

Spécification bande LED / Strip specification

CCT-Tunable Series | 2835 LED W+W Warm Dim
Puissance / Power : 14.4W/M [4.39W/ft.] @2400K
Voltage : 24VDC
1800K-3000K
Dimmable

*Pour plus d'information, communiquez avec nous. / For more information, contact us.

PSCD-60W12/24V KVP

120VAC KVP series 60W constant voltage PWM output TRIAC dimmable LED driver


SC's PWM output KVP (25W-200W) series of Constant Voltage ETL/cETL Listed AC phase-cut /triac dimming LED driver provides outstanding LED dimming performance, continuous smooth full range flicker-free dimming, and was designed to work with a wide range of MLV & ELV (forward phase / leading edge) TRIAC dimmers, such as Lutron, Leviton, Crestron etc...

- PWM output
- Full dimming range: 0-100%
- 5% minimum load
- Flicker-free
- Continuous, smooth
- IP20, for dry and damp location
- Low-profile plastic enclosure
- ETL, cETL, FCC, Class 2, RoHS

Specification:

| Model | KVP-12060-TDL | KVP-24060-TDL |
|--------------------|----------------------------|---------------|
| Output voltage | 12V | 24V |
| Output current | 5A | 2.5A |
| Rated power | 60W | |
| Input voltage | 100-130VAC | |
| Frequency | 47~63HZ | |
| Minimum load | 5% | |
| Dimming way | Triac/ Phase-cut, MLV, ELV | |
| Dimming range | 0-100% | |
| Dimensions (L*W*D) | 180*60*35mm | |
| N.W. | 0.45Kg | |

Reference wiring diagram

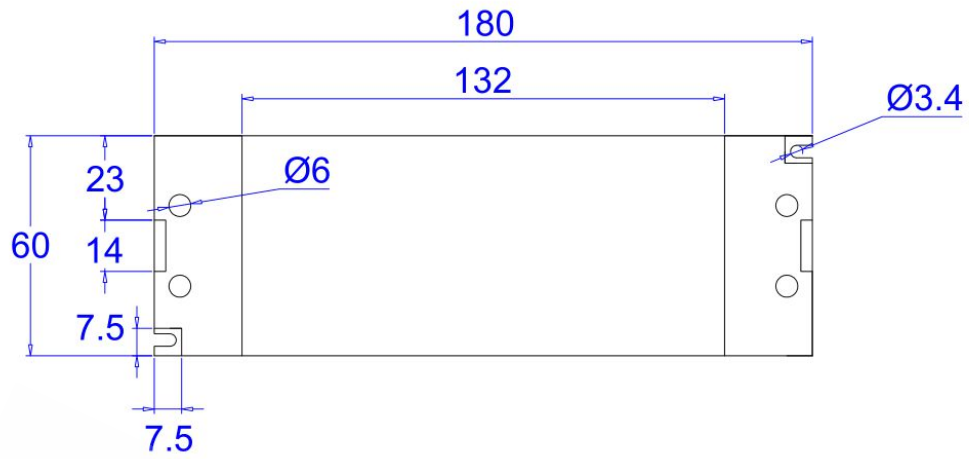

axentLED.com

